

DISPOSITIVO DI CHIUSURA STAGNO
WATERTIGHT ACCESS COVER & FRAME

luogo di installazione plate of installation	certificazione certification	caratteristiche - characteristics			opzioni - options
 Gruppo - Group 4 & gruppi inferiori lower groups		 guarnizione elastica cushioning insert	 Sistema di chiusura locked	 stagno watertight	 marcabura personalizzata customised badging

GBRE V3

DESCRIZIONE

Dispositivo di chiusura stagno in ghisa a grafite sferoidale, secondo ISO 1083 (grado 500 - 7) e EN 1563, conforme alla classe D 400 della norma EN 124 : 1994, forza di controllo: 400 kN.

CARATTERISTICHE

Coperchio circolare di ingombro Ø 650 mm. avvitato al telaio con tre viti inox e telaio circolare di ingombro Ø850 mm. , di altezza 102 mm. e di apertura libera Ø 600 mm. , munito di una guarnizione elastica, antirumore, antivibrazioni e di tenuta, in policloroprene tubolare Ø12 mm. Tenuta stagna garantita sino alla pressione di 1 bar.

RIVESTIMENTO

Vernice idrosolubile nera.

CERTIFICAZIONE PRODOTTO



NF

LUOGO DI INSTALLAZIONE

Gruppo 4 norma EN 124 : 1994 e gruppi inferiori.

OPZIONI

- GBRE V6: con 6 viti inox a bloccaggio del coperchio, tenuta stagna garantita sino a 2 bar.
- Marcature: consultateci.

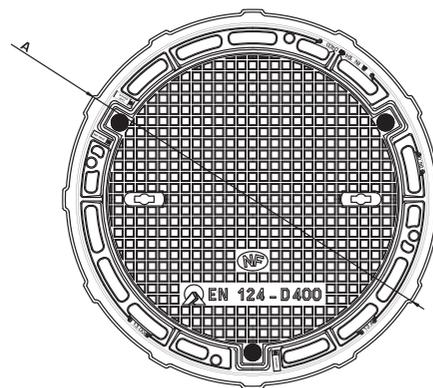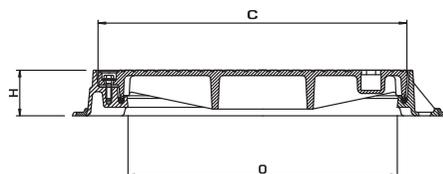

DESCRIPTION

Access cover and frame manufactured from spheroidal graphite cast iron in accordance with ISO 1083 (grade 500 - 7) and EN 1563.

Load classification D400 to EN 124 : 1994.

CHARACTERISTICS

Watertight solid top cover ø 650 mm overall flange bolted down by means of stainless steel bolts; circular frame with ø 850 mm overall flange, 102 mm depth and ø 600 mm clear opening. Incorporates a 12 mm chloroprene rubber seal to prevent noise and vibration (non - rock).

Watertight up to 1 bar.

COATING

Water based black paint.

PRODUCT CERTIFICATION

NF

PLACE OF INSTALLATION

Group 4: EN 124 - 1994 standard and lower groups.

OPTIONS

- GBRE V6 - watertight to 2 bar when bolted down with 6 stainless steel bolts (provided).
- Badging: please enquire

Ref.	Dimensioni - Dimensions (mm)				peso - weight (kg)	
	A x A' Ø A	O x O' Ø O	h	C x C' Ø C'	coperchio cover	tot
GBRE V3	850	800	100	650	45,5	85

 è un marchio registrato della EJ
 EJ registered mark

