luogo di installazione / place of installation | certificazione / certification | caratteristiche - characteristics

Gruppo - Group 3 & gruppi inferiori - lower groups

guarnizione elastica cushioning insert

DISPOSITIVO DI CHIUSURA A RIEMPIMENTO PAVÈ
ACCESS COVER & FRAME RECESSED FOR PAVIOR INFILL

RRC 350 - 500 - 650

DESCRIZIONE

Dispositivo di chiusura a riempimento pavè in ghisa a grafite sferoidale, secondo ISO 1083 (grado 500 – 7) e EN 1563, conforme alla classe C 250 della norma EN 124 : 1994, forza di controllo: 250 kN.

CARATTERISTICHE

Coperchio quadrato con vasca, profonda 75 mm. , predisposta per il riempimento* con materiali inerti omogenei alla circostante pavimentazione di dimensioni; inserire i valori del modello prescelto, munito di due fori ciechi utilizzabili dopo il riempimento per la manovra.Telaio quadrato di altezza 95 mm. , munito sulle superfici di appoggio del coperchio di guarnizioni elastiche, antirumore ed antivibrazioni, in policloroprene, di ingombro ed apertura libera; inserire i valori del modello prescelto.

RIVESTIMENTO

Vernice idrosolubile nera.

CERTIFICAZIONE PRODOTTO

NF

LUOGO DI INSTALLAZIONE

Gruppo 3 norma EN 124 : 1994 e gruppi inferiori.

Note: i coperchi a riempimento permettono una finitura in armonia con la pavimentazione circostante. * Vedi nota pag. 4 § 4.

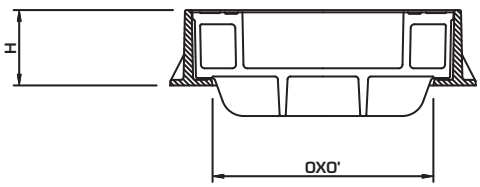

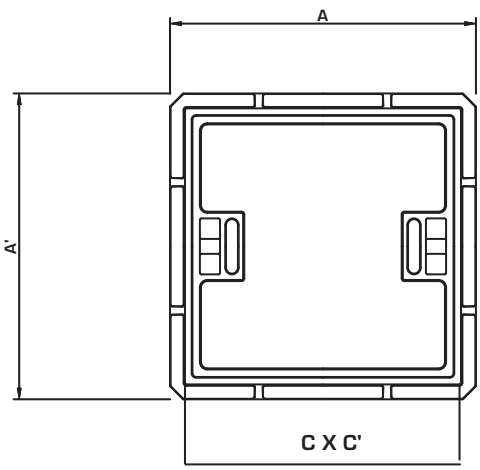

DESCRIPTION

Access cover and frame manufactured from spheroidal graphite cast iron in accordance with ISO 1083 (grade 500 - 7) and EN 1563.

Load classification C250 to EN 124 : 1994.

CHARACTERISTICS

Access cover recessed for pavior or concrete infill (infill depth 75mm). Square frame: overall flange, clear opening: insert dimensions of the selected product, 95 mm depth, frame incorporates a cushioning insert to prevent noise and vibration.

COATING

Water based black paint.

PRODUCT CERTIFICATION

NF

PLACE OF INSTALLATION

Group 3: EN 124 - 1994 standard and lower groups.

Note: *Covers recessed for pavior infill are designed to blend in with the surrounding environment.* *See note page 4 § 4

Ref.	Dimensioni - *Dimensions* (mm)				peso - *weight* (kg)	
	A x A' ø A	O x O' ø O	h	C x C' ø C'	coperchio cover	tot
RRC 350	420 x 420	300 x 300	95	350 x 350	21	35
Coperchio vuoto - *unfilled cover*						
RRC 500	600 x 600	450 x 450	95	500 x 500	37	58
Coperchio vuoto - *unfilled cover*						
RRC 650	750 x 750	600 x 600	95	650 x 650	52	82
Coperchio vuoto - *unfilled cover*						

é un marchio registrato della EJ
EJ registered mark