

DISPOSITIVO DI CORONAMENTO: BOCCHETTA KERB GULLIES



A812 - A80T

DESCRIZIONE

Bocchetta in ghisa a grafite sferoidale, secondo ISO 1083 (grado 500 - 7) e EN 1563, conforme alla classe C 250 della norma EN 124 : 1994, forza di controllo 250 kN.

CARATTERISTICHE

Ingombro 800 x 225 mm e profilo realizzato conformemente ai modelli standard, T3 e A2, del bordo dei marciapiedi. Predisposto per l'abbinamento con le griglie per cadi-toia (ns. mod. AV2, GI 754 e GI 756 vedi pag. 62).

Dimensioni del profilo; inserire i valori del modello prescelto.

RIVESTIMENTO

Vernice idrosolubile nera.

CERTIFICAZIONE PRODOTTO


NF

LUOGO DI INSTALLAZIONE

Gruppo 3 norma EN 124 : 1994 e gruppi inferiori.

OPZIONI

Marcatore: consultateci

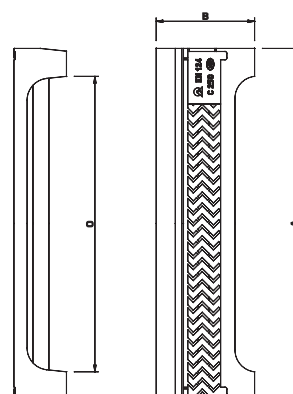

DESCRIPTION

Kerb gully manufactured from spheroidal graphite cast iron in accordance with standards ISO 1083 (grade 500 - 7) and EN 1563.

Load classification C250 to EN 124 : 1994.

CHARACTERISTICS

Kerb gully 800 mm wide, 225 mm depth to suit standard kerb profiles.

Dimensions: insert dimensions of the selected product.

COATING

Water based black paint.

PRODUCT CERTIFICATION


NF

PLACE OF INSTALLATION

Group 3: EN 124 - 1994 standard and lower groups.

OPTIONS

Badging: please enquire

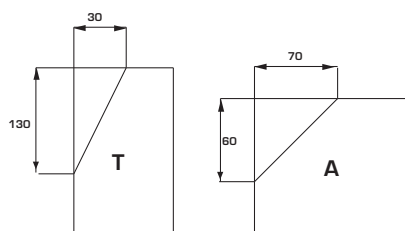

Ref.	Dimensioni - Dimensions (mm)				peso - weight (kg)
	A x B	O	H	H1	
A 812	800 x 225	675	120	90	17
A 80 T	800 x 225	675	195	140	25



é un marchio registrato della EJ
 EJ registered mark

