


DISPOSITIVO DI CHIUSURA ARTICOLATO HINGED ACCESS COVER & FRAME

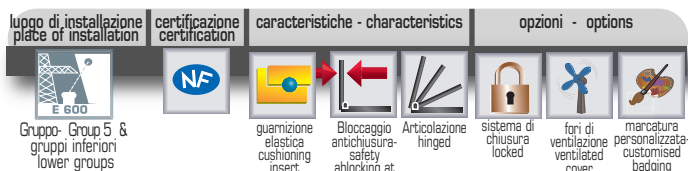

SOLO™ SE

DESCRIZIONE

Dispositivo di chiusura articolato in ghisa a grafite sferoidale, secondo ISO 1083 (grado 500 - 7) e EN 1563, conforme alla classe E 600 della norma EN 124 : 1994, forza di controllo: 600 kN.

CARATTERISTICHE

Coperchio articolato di ingombro Ø 650 mm. con bloccaggio antichiusura accidentale ed estraibile in posizione di massima apertura, autocentrante nel proprio telaio, munito di guarnizione elastica in policloroprene antirumore ed antivibrazioni; telaio quadrato di ingombro 850x850 mm. (telaio circolare Ø 850 mm.) di altezza 100 mm. , di apertura libera Ø 600 mm. ed equipaggiato di 4 fori per fissaggio sul pozzetto, se necessario.

RIVESTIMENTO

Vernice idrosolubile nera.

CERTIFICAZIONE PRODOTTO


NF

LUOGO DI INSTALLAZIONE

Gruppo 5 norma EN 124 : 1994 e gruppi inferiori.

OPZIONI

- Sistema di chiusura: Precipitare "V" nel ref.
- Fori di aerazione: Precipitare "VENT" nel ref.
- Marcature: Consultateci

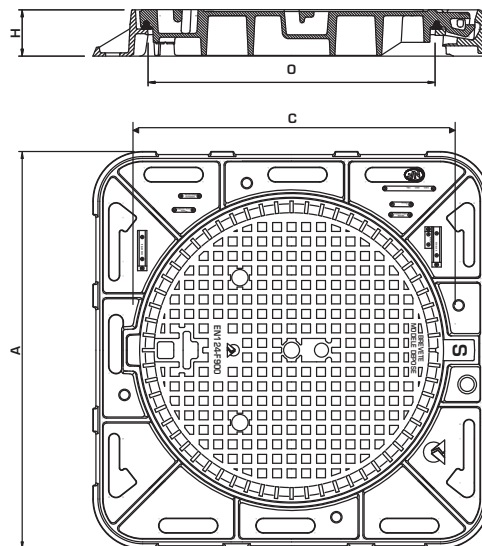

DESCRIPTION

Access cover and frame manufactured from spheroidal graphite cast iron in accordance with standards ISO 1083 (grade 500 - 7) and EN 1563.

Load classification E600 to EN 124 : 1994.

CHARACTERISTICS

Solid top hinged access cover, ø 650 mm overall flange, cover blocks at 90° for safety and is removable from the frame when completely opened; cover is positioned centrally within the frame and incorporates a wide flat chloroprene rubber cushioning insert to prevent vibration and noise (non - rock). Square frame 850 x 850 mm overall flange (circular frame: ø 850), 100 mm depth, ø 600 mm clear opening, provided with 4 anchoring holes that can be used to fix the frame to brickwork as necessary.

COATING

Water based black paint.

PRODUCT CERTIFICATION

NF

PLACE OF INSTALLATION

Group 5: EN 124 - 1994 standard and lower groups.

OPTIONS

- Locking: "V" to be added to reference
- Vents: " VENT" to be added to the reference
- Badging: please enquire

Ref.	Dimensioni - Dimensions (mm)				peso - weight (kg)	
	A x A' ø A	O x O' ø O	h	C x C' ø C'	coperchio cover	tot
SOLO S ER	850	600	100	650	67	100
telaio ottagonale - octagonal frame						
SOLO S EC	850	600	100	650	61	99
telaio quadrato - square frame						



é un marchio registrato della EJ
EJ registered mark

